

6517B

Electrometer/High Resistance Meter



Measures resistances up to $10^{16}\Omega$

1fA–20mA current measurement range

<20 μ V burden voltage on lowest current ranges

200T Ω input impedance

<3fA bias current

Up to 425 rdgs/s

0.75fA p-p noise

Built-in \pm 1kV voltage source

Unique voltage reversal method for high resistance measurements

Optional plug-in scanner cards

Ordering Information

6517B Electrometer/High Resistance Meter

Accessories Supplied

237-ALG-2 Low Noise Triax Cable, 3-slot Triax to Alligator Clips, 2m (6.6 ft)

8607 Safety High Voltage Dual Test Leads

6517-TP Thermocouple Bead Probe

CS-1305 Interlock Connector

Keithley's 5½-digit Model 6517B Electrometer/High Resistance Meter offers accuracy and sensitivity specifications unmatched by any other meter of this type. It also offers a variety of features that simplify measuring high resistances and the resistivity of insulating materials. With reading rates of up to 425 readings/second, the Model 6517B is also significantly faster than competitive electrometers, so it offers a quick, easy way to measure low-level currents.

Exceptional Performance Specifications

The half-rack-sized Model 6517B has a special low current input amplifier with an input bias current of <3fA with just 0.75fA p-p (peak-to-peak) noise and <20 μ V burden voltage on the lowest range. The input impedance for voltage and resistance measurements is 200T Ω for near-

ideal circuit loading. These specifications ensure the accuracy and sensitivity needed for accurate low current and high impedance voltage, resistance, and charge measurements in areas of research such as physics, optics, nanotechnology, and materials science. A built-in \pm 1kV voltage source with sweep capability simplifies performing leakage, breakdown, and resistance testing, as well as volume (Ω -cm) and surface resistivity (Ω /square) measurements on insulating materials.

Wide Measurement Ranges

The Model 6517B offers full autoranging over the full span of ranges on current, resistance, voltage, and charge measurements:

- Current measurements from 1fA to 20mA
- Voltage measurements from 10 μ V to 200V
- Resistance measurements from 50 Ω to $10^{16}\Omega$
- Charge measurements from 10fC to 2 μ C

ACCESSORIES AVAILABLE

CABLES

6517B-ILC-3	Interlock Cable
7007-1	Shielded IEEE-488 Cable, 1m (3.2 ft)
7007-2	Shielded IEEE-488 Cable, 2m (6.5 ft)
7009-5	RS-232 Cable
7078-TRX-3	Low Noise Triax Cable, 3-Slot Triax Connectors, 0.9m (3 ft)
7078-TRX-10	Low Noise Triax Cable, 3-Slot Triax Connectors, 3m (10 ft)
7078-TRX-20	Low Noise Triax Cable, 3-Slot Triax Connectors, 6m (20 ft)
8501-1	Trigger Link Cable, 1m (3.3 ft)
8501-2	Trigger Link Cable, 2m (6.6 ft)
8503	Trigger Link Cable to 2 male BNCs, 1m (3.3 ft)
8607	1kV Source Banana Cables

PROBES

6517-RH	Humidity Probe with Extension Cable
6517-TP	Temperature Bead Probe (included with 6517B)

TEST FIXTURE

8009	Resistivity Test Fixture
------	--------------------------

OTHER

CS-1305	Interlock Connector
---------	---------------------

ADAPTERS

237-BNC-TRX	Male BNC to 3-Lug Female Triax Adapter
237-TRX-NG	Triax Male-Female Adapter with Guard Disconnected
237-TRX-T	3-Slot Male Triax to Dual 3-Lug Female Triax Tee Adapter
237-TRX-TBC	3-Lug Female Triax Bulkhead Connector (1.1kV rated)
7078-TRX-BNC	3-Slot Male Triax to BNC Adapter
7078-TRX-GND	3-Slot Male Triax to BNC Adapter with guard removed
7078-TRX-TBC	3-Lug Female Triax Bulkhead Connector with Cap

SOFTWARE

6524	High Resistance Measurement Software
------	--------------------------------------

RACK MOUNT KITS

4288-1	Single Fixed Rack Mounting Kit
4288-2	Dual Fixed Rack Mounting Kit

SCANNER CARDS

6521	Low Current Scanner Card
6522	Voltage/Low Current Scanner Card

GPIB INTERFACES

KPCI-488LP	IEEE-488 Interface/Controller for the PCI Bus
KPXI-488	IEEE-488 Interface Board for the PXI Bus
KUSB-488A	IEEE-488 USB-to-GPIB Interface Adapter

Simplifies measuring high resistances and the resistivity of insulating materials

LOW LEVEL MEASURE & SOURCE

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

6517B

Electrometer/High Resistance Meter

Simple DMM-like Operation

The Model 6517B is designed for easy, DMM-like operation via the front panel, with single-button control of important functions such as resistance measurement. It can also be controlled via a built-in IEEE-488 interface, which makes it possible to program all functions over the bus through a computer controller.

High Accuracy High Resistance Measurements

The Model 6517B offers a number of features and capabilities that help ensure the accuracy of high resistance measurement applications. For example, the built-in voltage source simplifies determining the relationship between an insulator's resistivity and the level of source voltage used. It is well suited for capacitor leakage and insulation resistance measurements, tests of the surface insulation resistance of printed circuit boards, voltage coefficient testing of resistors, and diode leakage characterization.

A test sequence in the Model 6517B incorporates a new voltage reversal method for measuring very high resistances, especially in materials and devices where the inherent background currents in the sample previously made accurate measurements impossible. The optional Model 6524 software package simplifies operating the Model 6517B via a computer controller and makes it easy to optimize the test parameters (delay time, voltage, etc.) for the specific material or device under test. The Model 6517B meter, the software, and a resistivity fixture are available as a combination for specific material or device testing applications. Refer to the Model 65 for more information.

Temperature and Humidity Stamping

Humidity and temperature can influence the resistivity values of materials significantly. To help you make accurate comparisons of readings acquired under varying conditions, the Model 6517B offers a built-in type K thermocouple and an optional Model 6517-RH Relative Humidity Probe. A built-in

data storage buffer allows recording and recalling readings stamped with the time, temperature, and relative humidity at which they were acquired.

Accessories Extend Measurement Capabilities

A variety of optional accessories can be used to extend the Model 6517B's applications and enhance its performance.

Scanner Cards. Two scanner cards are available to simplify scanning multiple signals. Either card can be easily inserted in the option slot of the instrument's back panel. The Model 6521 Scanner Card offers ten channels of low-level current scanning. The Model 6522 Scanner Card provides ten channels of high impedance voltage switching or low current switching.

Test Fixture. The Model 8009 Resistivity Chamber is a guarded test fixture for measuring volume and surface resistivities of sample materials. It has stainless-steel electrodes built to ASTM standards. The fixture's electrode dimensions are pre-programmed into the Model 6517B, so there's no need to calculate those values then enter them manually. This accessory is designed to protect you from contact with potentially hazardous voltages—opening the lid of the chamber automatically turns off the Model 6517B's voltage source.

Applications

The Model 6517B is well suited for low current and high impedance voltage, resistance, and charge measurements in areas of research such as physics, optics, and materials science. Its extremely low voltage burden makes it particularly appropriate for use in solar cell applications, and its built-in voltage source and low current sensitivity make it an excellent solution for high resistance measurements of nanomaterials such as polymer based nanowires. Its high speed and ease of use also make it an excellent choice for quality control, product engineering, and production test applications involving leakage, breakdown, and resistance testing. Volume and surface resistivity measurements on non-conductive materials are particularly enhanced by the Model 6517B's voltage reversal method.


Model 6517B Enhancements

The Model 6517B is an updated version, replacing the earlier Model 6517A, which was introduced in 1996. Software applications created for the Model 6517A using SCPI commands can run without modifications on the Model 6517B. However, the Model 6517B does offer some useful enhancements to the earlier design. Its internal battery-backed memory buffer can now store up to 50,000 readings, allowing users to log test results for longer periods and to store more data associated with those readings. The new model also provides faster reading rates to the internal buffer (up to 425 readings/second) and to external memory via the IEEE bus (up to 400 readings/second). Several connector modifications have been incorporated to address modern connectivity and safety requirements.

SERVICES AVAILABLE

6517B-3Y-EW	1-year factory warranty extended to 3 years from date of shipment
C/6517B-3Y-ISO	3 (ISO-17025 accredited) calibrations within 3 years of purchase*
TRN-LLM-1-C	Course: Making Accurate Low-Level Measurements

*Not available in all countries

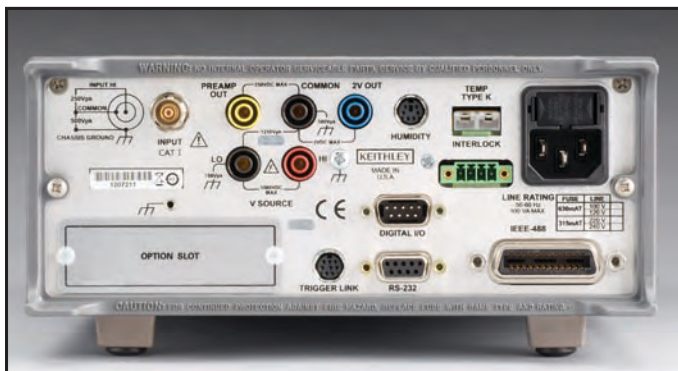

Model 6517B rear panel

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

6517B

Electrometer/High Resistance Meter

VOLTS		ACCURACY	TEMPERATURE
5½-DIGIT RANGE	(1 Year) ¹ 18°-28°C RESOLUTION	COEFFICIENT 0°-18°C & 28°-50°C ±(%rdg+counts)	±(%rdg+counts)/°C
2 V	10 μV	0.025 + 4	0.003 + 2
20 V	100 μV	0.025 + 3	0.002 + 1
200 V	1 mV	0.06 + 3	0.002 + 1

NMRR: 2V and 20V ranges >60dB, 200V range >55dB. 50Hz or 60Hz².

CMRR: >120dB at DC, 50Hz or 60Hz.

INPUT IMPEDANCE: >200TΩ in parallel with 20pF, <2pF guarded (1MΩ with zero check on).

SMALL SIGNAL BANDWIDTH AT PREAMP OUTPUT: Typically 100kHz (-3dB).

- When properly zeroed, 5½-digit, 1 PLC (power line cycle), median filter on, digital filter = 10 readings.
- Line sync on.

AMPS		ACCURACY	TEMPERATURE
5½-DIGIT RANGE	(1 Year) ¹ 18°-28°C RESOLUTION	COEFFICIENT 0°-18°C & 28°-50°C ±(%rdg+counts)	±(%rdg+counts)/°C
20 pA	100 aA ²	1 + 30	0.1 + 5
200 pA	1 fA ²	1 + 5	0.1 + 1
2 nA	10 fA	0.2 + 30	0.1 + 2
20 nA	100 fA	0.2 + 5	0.03 + 1
200 nA	1 pA	0.2 + 5	0.03 + 1
2 μA	10 pA	0.1 + 10	0.005 + 2
20 μA	100 pA	0.1 + 5	0.005 + 1
200 μA	1 nA	0.1 + 5	0.005 + 1
2 mA	10 nA	0.1 + 10	0.008 + 2
20 mA	100 nA	0.1 + 5	0.008 + 1

INPUT BIAS CURRENT: <3fA at T_{CAL}. Temperature coefficient = 0.5fA/°C, 20pA range.

INPUT BIAS CURRENT NOISE: <750aA p-p (capped input), 0.1Hz to 10Hz bandwidth, damping on. Digital filter = 40 readings, 20pA range.

INPUT VOLTAGE BURDEN at T_{CAL} ±1°C:

- <20μV on 20pA, 2nA, 20nA, 2μA, and 20μA ranges.
- <100μV on 200pA, 200nA, and 200μA ranges.
- <2mV on 2mA range. <5mV on 20mA range.

TEMPERATURE COEFFICIENT OF INPUT VOLTAGE BURDEN: <10μV/°C on pA, nA, and μA ranges.

PREAMP SETTLING TIME (to 10% of final value) Typical: 0.5sec (damping off) 2.0 sec (damping on) on pA ranges. 15msec on nA ranges damping off, 1msec on μA ranges damping off. 500μsec on mA ranges damping off.

NMRR: >60dB on all ranges at 50Hz or 60Hz².

- When properly zeroed, 5½-digit, 1PLC (power line cycle), median filter on, digital filter = 10 readings.
- aA = 10⁻⁸A, fA = 10⁻¹⁵A.
- Line sync on.

COULOMBS		ACCURACY	TEMPERATURE
5½-DIGIT RANGE	(1 Year) ^{1,2} 18°-28°C RESOLUTION	COEFFICIENT 0°-18°C & 28°-50°C ±(%rdg+counts)	±(%rdg+counts)/°C
2 nC	10 fC	0.4 + 5	0.04 + 3
20 nC	100 fC	0.4 + 5	0.04 + 1
200 nC	1 pC	0.4 + 5	0.04 + 1
2 μC	10 pC	0.4 + 5	0.04 + 1

1. Specifications apply immediately after charge acquisition. Add

$$\left(4fA + \frac{|Q_n|}{RC}\right) T_n$$

where T_n = period of time in seconds between the coulombs zero and measurement
Q_n = average charge measured over T_n, and RC = 300,000 typical.

- When properly zeroed, 5½-digit, 1PLC (power line cycle), median filter on, digital filter = 10 readings.

INPUT BIAS CURRENT: <4fA at T_{CAL}. Temperature coefficient = 0.5fA/°C, 2nC range.

OHMS (Normal Method)

RANGE	5½-DIGIT RESOLUTION	ACCURACY ¹ (10-100% Range) 18°-28°C (1 Year) ±(% rdg+counts)	TEMPERATURE COEFFICIENT (10-100% Range) 0°-18°C & 28°-50°C ±(% rdg+counts)	AUTO V SOURCE	AMPS RANGE
20 MΩ	100 Ω	0.125 + 1	0.01 + 1	40 V	20 μA
200 MΩ	1 kΩ	0.15 + 1	0.015 + 1	40 V	2 μA
2 GΩ	10 kΩ	0.225 + 1	0.035 + 1	40 V	200 nA
20 GΩ	100 kΩ	0.225 + 1	0.035 + 1	40 V	20 nA
200 GΩ	1 MΩ	0.35 + 1	0.110 + 1	40 V	2 nA
2 TΩ	10 MΩ	0.35 + 1	0.110 + 1	400 V	2 nA
20 TΩ	100 MΩ	1.025 + 1	0.105 + 1	400 V	200 pA
200 TΩ	1 GΩ	1.15 + 1	0.125 + 1	400 V	20 pA

- Specifications are for auto V-source ohms, when properly zeroed, 5½-digit, 1PLC, median filter on, digital filter = 10 readings. If user selectable voltage is required, use manual mode. Manual mode displays resistance (up to 10¹⁸Ω) calculated from measured current. Accuracy is equal to accuracy of V-source plus accuracy of selected Amps range.

PREAMP SETTLING TIME: Add voltage source settling time to preamp settling time in Amps specification. Ranges over 20GΩ require additional settling based on the characteristics of the load.

OHMS (ALTERNATING POLARITY METHOD)

The alternating polarity sequence compensates for the background (offset) currents of the material or device under test. Maximum tolerable offset up to full scale of the current range used.

Using Keithley 8009 fixture

REPEATABILITY: ΔI_{BG} × R/V_{ALT} + 0.1% (1σ) (instrument temperature constant ±1°C).

ACCURACY: (V_{SRC}Err + I_{MEAS}Err × R)/V_{ALT}

where: ΔI_{BG} is a measured, typical background current noise from the sample and fixture.

V_{ALT} is the alternating polarity voltage used.

V_{SRC}Err is the accuracy (in volts) of the voltage source using V_{ALT} as the setting.

I_{MEAS}Err is the accuracy (in amps) of the ammeter using V_{ALT}/R as the reading.

VOLTAGE SOURCE

RANGE	5½-DIGIT RESOLUTION	ACCURACY (1 Year) 18°-28°C ±(% setting + offset)	TEMPERATURE COEFFICIENT 0°-18°C & 28°-50°C ±(% setting+offset)/°C
100 V	5 mV	0.15 + 10 mV	0.005 + 1 mV
1000 V	50 mV	0.15 + 100 mV	0.005 + 10 mV

MAXIMUM OUTPUT CURRENT:

- 100V Range: ±10mA, hardware short circuit protection at <14mA.
- 1000V Range: ±1mA, hardware short circuit protection at <1.4mA.

SETTLING TIME:

- 100V Range: <8ms to rated accuracy.
- 1000V Range: <50ms to rated accuracy.

NOISE (typical):

- 100V Range: <2.6mV rms.
- 1000V Range: <2.9mV rms.

TEMPERATURE (Thermocouple)

THERMOCOUPLE TYPE	RANGE	ACCURACY (1 Year) ¹ 18°-28°C ±(% rdg + °C)
K	-25°C to 150°C	±(0.3% + 1.5°C)

- Excluding probe errors, T_{cal} ± 5°C, 1 PLC integration time.

HUMIDITY

RANGE	ACCURACY (1 Year) ¹ 18°-28°C, ±(% rdg + % RH)
0-100%	±(0.3% + 0.5)

- Humidity probe accuracy must be added. This is ±3% RH for Model 6517-RH, up to 65°C probe environment, not to exceed 85°C.

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

6517B

Electrometer/High Resistance Meter

IEEE-488 BUS IMPLEMENTATION

IMPLEMENTATION: SCPI (IEEE-488.2, SCPI-1999.0).
TRIGGER TO READING DONE: 150ms typical, with external trigger.
RS-232 IMPLEMENTATION: Supports: SCPI 1991.0.
Baud Rates: 300, 600, 1200, 2400, 4800, 9600, 19.2k, 38.4k, 57.6k, and 115.2k.
FLOW CONTROL: None, Xon/Xoff.
CONNECTOR: DB-9 TXD/RXD/GND.

GENERAL

DISPLAY: 6½-digit vacuum fluorescent multiline.
OVERRRANGE INDICATION: Display reads "OVERFLOW" for readings >105% of range. The display reads "OUT OF LIMIT" for excessive overrange conditions.
RANGING: Automatic or manual.
CONVERSION TIME: Selectable 0.01PLC to 10PLC.
MAXIMUM INPUT: 250V peak, DC to 60Hz sine wave; 10sec per minute maximum on mA ranges.
MAXIMUM COMMON MODE VOLTAGE (DC to 60Hz sine wave): Electrometer, 500V peak; V Source, 750V peak.
ISOLATION (Meter COMMON to chassis): >10¹⁰Ω, <500pF.
INPUT CONNECTOR: Three lug triaxial on rear panel.
2V ANALOG OUTPUT: 2V for full range input. Non-inverting in Volts mode, inverting when measuring Amps, Ohms, or Coulombs. Output impedance 10kΩ.
PREAMP OUTPUT: Provides a guard output for Volts measurements. Can be used as an inverting output or with external feedback in Amps and Coulombs modes.
EXTERNAL TRIGGER: TTL compatible External Trigger and Electrometer Complete.
GUARD: Switchable voltage guard available.
DIGITAL I/O AND TRIGGER LINE: Available, see manual for usage.
EMC: Conforms to European Union Directive 89/336/EEC, EN 61326-1.

SAFETY: Conforms to European Union Directive 73/23/EEC, EN 61010-1.
READING STORAGE: 50,000.
READING RATES:
To Internal Buffer: 425 readings/second¹.
To IEEE-488 Bus: 400 readings/second^{1,2}.
Bus Transfer: 3300 readings/second².
1. 0.01PLC, digital filters off, front panel off, temperature + RH off, Line Sync off.
2. Binary transfer mode.
DIGITAL FILTER: Median and averaging.
ENVIRONMENT: Operating: 0°–50°C, relative humidity 70% non-condensing, up to 35°C. **Storage:** –25° to +65°C.
ALTITUDE: Maximum 2000 meters above sea level per EN 61010-1.
WARM-UP: 1 hour to rated accuracy (see manual for recommended procedure).
POWER: User selectable 100, 120, 220, 240VAC ±10%; 50/60Hz, 100VA max.
PHYSICAL: Case Dimensions: 90mm high × 214mm wide × 369mm deep (3½ in. × 8½ in. × 14½ in.).
Working Dimensions: From front of case to rear including power cord and IEEE-488 connector: 15.5 inches.
Net Weight: 5.4kg (11.8 lbs.).
Shipping Weight: 6.9kg (15.1 lbs.).

Specifications are subject to change without notice.

All Keithley trademarks and trade names are the property of Keithley Instruments, Inc.
All other trademarks and trade names are the property of their respective companies.

KEITHLEY

A G R E A T E R M E A S U R E O F C O N F I D E N C E

KEITHLEY INSTRUMENTS, INC. ■ 28775 AURORA ROAD ■ CLEVELAND, OHIO 44139-1891 ■ 440-248-0400 ■ Fax: 440-248-6168 ■ 1-888-KEITHLEY ■ www.keithley.com

BELGIUM
Sint-Pieters-Leeuw
Ph: 02-3630040
Fax: 02-3630064
info@keithley.nl
www.keithley.nl

CHINA
Beijing
Ph: 8610-82255010
Fax: 8610-82255018
china@keithley.com
www.keithley.com.cn

FINLAND
Espoo
Ph: 09-88171661
Fax: 09-88171662
finland@keithley.com
www.keithley.com

FRANCE
Saint-Aubin
Ph: 01-64532020
Fax: 01-60117726
info@keithley.fr
www.keithley.fr

GERMANY
Germering
Ph: 089-84930740
Fax: 089-84930734
info@keithley.de
www.keithley.de

INDIA
Bangalore
Ph: 080-26771071, -72, -73
Fax: 080-26771076
support_india@keithley.com
www.keithley.com

ITALY
Peschiera Borromeo (Mi)
Ph: 02-5538421
Fax: 02-55384228
info@keithley.it
www.keithley.it

JAPAN
Tokyo
Ph: 81-3-5733-7555
Fax: 81-3-5733-7556
info.jp@keithley.com
www.keithley.jp

KOREA
Seoul
Ph: 82-2-574-7778
Fax: 82-2-574-7838
keithley@keithley.co.kr
www.keithley.co.kr

MALAYSIA
Penang
Ph: 60-4-656-2592
Fax: 60-4-656-3794
chan_patrick@keithley.com
www.keithley.com

NETHERLANDS
Gorinchem
Ph: 0183-635333
Fax: 0183-630821
info@keithley.nl
www.keithley.nl

SINGAPORE
Singapore
Ph: 65-6747-9077
Fax: 65-6747-2991
koh_william@keithley.com
www.keithley.com.sg

SWEDEN
Solna
Ph: 08-50904600
Fax: 08-6552610
sweden@keithley.com
www.keithley.com

SWITZERLAND
Zürich
Ph: 044-8219444
Fax: 044-8203081
info@keithley.ch
www.keithley.ch

TAIWAN
Hsinchu
Ph: 886-3-572-9077
Fax: 886-3-572-9031
info.kei@keithley.com.tw
www.keithley.com.tw

UNITED KINGDOM
Theale
Ph: 0118-9297500
Fax: 0118-9297519
info@keithley.co.uk
www.keithley.co.uk